



Automation & Controls

5 Channel Timer Instructions

1: SETTING UP THE MOTOR: During the settings, the interval between two operations must be less than 6 seconds to keep the motor in the programming mode.

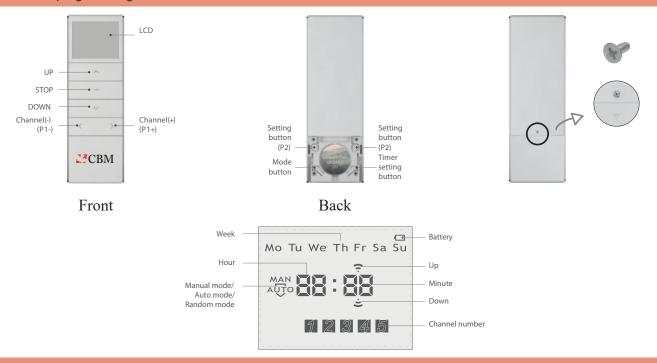

1. SET CURRENT TIME

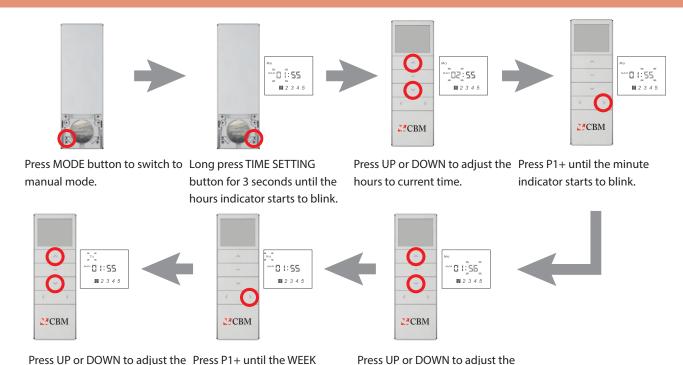

Canadian Blind Manufacturing Inc. www.cdnblind.com #cbmblinds

day to current.

MINUTES to current time.

1


indicator starts to blink.



Automation & Controls

5 Channel Timer Instructions


1. SET CURRENT TIME (CONTINUED)



Press Time Setting button for 3 seconds. Both the HOUR and MINUTE indicator will blink.

Press TIME SETTING button again to start the seconds count from ZERO.

2. SET TIMERS

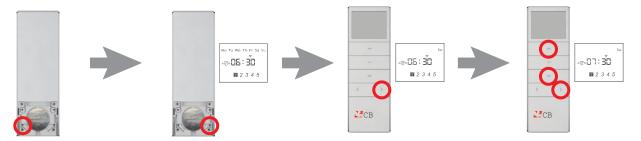


Press MODE button to switch to Long press TIME SETTING AUTO mode.

button for 3 seconds until the DAY indicator starts to blink.

Press P1+ to select the desired combination. Press STOP to confirm.

Press UP or DOWN to select the HOUR for shades to OPEN. Press P1+ to confirm.

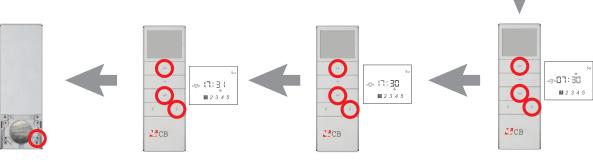

for 3 seconds until the HOUR and MINUTE indicators blink. MINUTES for shades to CLOSE. HOUR for shades to CLOSE. Press P1+ to confirm.

Press P1+ to confirm.

Long press TIME SETTING button Press UP or DOWN to select the Press UP or DOWN to select the Press UP or DOWN to select the MINUTES for shades to OPEN. Press P1+ to confirm.